


Mud Motor Series Specifications

Motor Sizes: 3 ½ - 6 ⅝

Size (in)	Short Bit to Bend		Reg. Bit to Bend		Flex Shaft		Config.		Speed Ratio (rev/gal)	GPM	RPM	Rec. Diff. Press. (psi)	TQ Ratio (ft-lb/psi)	TQ @ Max Diff. (ft-lbs)	Stall TQ (ft-lbs)
	Fixed	Adj.	Fixed	Adj.	Short	Reg.	Lobe	Stage							
3 ½	40.5	N/A	40.5	N/A	N/A		7/8	4.7	1.769	120-210	212-371	1,060	1.437	1,520	2,280
4 ¾	37.63	51.45	52.69	63	N/A		7/8	2.6	0.263	150-300	39-79	590	8.974	5,250	7,880
							7/8	3.8	0.521	150-250	78-140	860	5.200	4,450	6,670
							5/6	8.3	1.000	100-300	100-300	1,870	2.576	4,810	7,220
5	39	52	51.13	63.38	46.37	58.5	7/8	2.6	0.263	150-300	39-79	590	8.974	5,250	7,880
							7/8	8.3	0.480	200-400	100-200	1,960	4.800	9,370	14,750
							6/7	7.8	0.600	200-400	120-240	1,760	4.288	7,530	11,300
							5/6	6.7	0.630	150-350	90-220	1,510	3.980	6,000	9,000
							6/7	8.8	0.660	150-400	100-260	2,070	3.700	7,660	12,060
							7/8	8.2	0.700	150-350	105-250	1,880	3.631	6,700	10,050
							6/7	8.0	0.810	150-350	121-290	1,840	3.176	5,720	8,580
							7/8	10.6	0.855	150-350	128-300	2,390	2.975	7,100	10,640
5 ¼	N/A	N/A	N/A	N/A	53.88	53.88	5/6	8.3	1.000	100-300	100-300	1,870	2.576	4,810	7,220
							7/8	4.1	0.260	200-400	50-100	970	9.200	8,870	13,970
							7/8	8.3	0.480	200-400	100-200	1,960	4.800	9,370	14,750
							6/7	10.9	0.750	200-400	150-300	2,570	3.270	8,380	13,200
							6/7	11.3	0.750	150-400	110-300	2,520	3.280	8,720	13,720
							7/8	10.6	0.855	150-350	128-300	2,390	2.975	7,100	10,640
							7/8	13.1	0.900	175-375	158-338	3,000	2.862	9,260	13,880
5 ½	N/A	N/A	N/A	N/A	53.88	53.88	4/5	10.3	1.000	100-400	100-400	2,430	2.610	6,320	9,960
							7/8	4.1	0.260	200-400	50-100	970	9.200	8,870	13,970
							7/8	8.3	0.480	200-400	100-200	1,960	4.800	9,370	14,750
							6/7	8.8	0.660	150-440	100-260	2,070	3.700	7,660	12,060
							6/7	10.9	0.750	200-400	150-300	2,570	3.270	8,380	13,200
							6/7	11.3	0.750	150-400	110-300	2,520	3.280	8,720	13,720
							7/8	10.6	0.855	150-350	128-300	2,390	2.975	7,100	10,640
5 ¾	N/A	N/A	N/A	N/A	60.25	60.25	4/5	10.3	1.000	100-400	100-400	2,430	2.610	6,320	9,960
							6/7	11.3	0.750	200-400	150-300	3,110	3.280	10,190	15,290
6 ½ & 6 ¾	47	65.32	64.25	82.5	62.25	62.25	7/8	13.1	0.900	175-375	158-338	3,000	2.862	9,260	13,880
							6/7	7.8	0.290	350-700	100-200	1,840	8.580	15,730	24,780
							7/8	3.3	0.140	300-600	42-84	740	19.000	14,110	21,160
							7/8	5.7	0.242	300-600	72-150	1,280	10.698	13,720	20,580
							7/8	5.0	0.288	300-600	86-180	1,130	9.300	10,460	15,690
							6/7	5.0	0.292	300-600	87-180	1,130	8.313	9,350	14,030
							6/7	7.6	0.330	300-700	99-231	1,808	8.140	14,717	22,076
6 ⅝	47	65.32	64.25	N/A	62.25	62.25	4/5	7.0	0.497	300-600	149-300	1,580	5.770	9,090	13,630
							7/8	6.9	0.250	300-700	74-172	1,743	10.095	17,569	28,000
							6/7	7.8	0.290	350-700	100-200	1,840	8.580	15,730	24,780
							6/7	7.6	0.315	400-700	126-221	1,710	8.172	13,970	20,960
							5/6	9.5	0.340	450-700	150-240	2,240	7.490	16,730	26,340

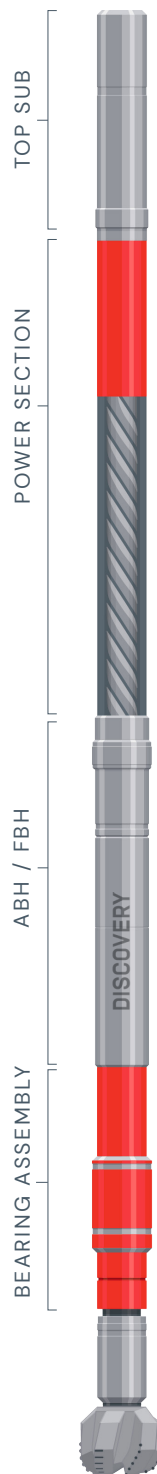

Download




Motor Book

Mud Motor Series Specifications

Motor Sizes: 7 - 9 5/8

Size (in)	Short Bit to Bend		Reg. Bit to Bend		Flex Shaft		Config.		Speed Ratio (rev/ gal)	GPM	RPM	Rec. Diff. Press. (psi)	TQ Ratio (ft-lb/ psi)	TQ @ Max Diff. (ft-lbs)	Stall TQ (ft-lbs)
	Fixed	Adj.	Fixed	Adj.	Short	Reg.	Lobe	Stage							
7	48.13	66.44	N/A	N/A	7/8	8.5	0.240	400-750	100-180	2,000	9.780	19,540	30,770		
					7/8	6.9	0.250	300-700	74-172	1,743	10.095	17,569	28,000		
					5/6	9.5	0.340	450-750	150-260	2,240	7.490	16,730	26,350		
					5/6	9.4	0.400	300-700	119-279	1,952	5.964	11,644	17,466		
7 combo	48.13	66.44	60.88	79	61	7/8	3.3	0.140	300-700	42-84	740	19.000	14,110	21,160	
						7/8	5.7	0.242	300-600	72-150	1,280	10.698	13,720	20,580	
						6/7	7.8	0.290	350-700	100-200	1,840	8.580	15,730	24,780	
						6/7	5.0	0.292	300-600	87-180	1,130	8.313	9,350	14,030	
						6/7	7.6	0.330	300-700	99-231	1,808	8.140	14,717	22,076	
						4/5	7.0	0.497	300-600	149-300	1,050	5.770	9,090	13,630	
7 ¼	61.25	N/A	73.88	N/A	61.25	73.88	7/8	6.7	0.180	500-800	90-140	1,580	13.490	21,250	33,460
							7/8	8.5	0.240	400-750	100-180	2,000	9.780	19,540	30,770
7 ¼ combo	N/A		73.88	N/A	N/A		7/8	8.5	0.240	400-750	100-180	2,000	9.780	19,540	30,770
7 ¾	N/A	N/A	68.5	88.5	N/A	7/8	3.4	0.087	400-900	30-80	800	28.190	22,530	35,480	
						7/8	4.0	0.160	300-900	48-143	1,000	16.400	16,400	24,600	
						7/8	5.9	0.160	400-900	80-140	1,390	15.770	21,870	34,400	
						7/8	7.0	0.166	400-1000	66-166	1,580	15.323	24,130	36,200	
						4/5	5.3	0.240	300-950	70-230	1,250	10.930	13,620	21,450	
8	N/A	N/A	68.5	88.5	N/A	7/8	3.4	0.087	400-900	30-80	800	28.190	22,530	35,480	
						7/8	4.0	0.160	300-900	48-143	1,000	16.400	16,400	24,600	
						7/8	5.9	0.160	400-900	80-140	1,390	15.770	21,870	34,400	
						7/8	7.0	0.166	400-1000	66-166	1,580	15.323	24,130	36,200	
						4/5	5.3	0.240	300-950	70-230	1,250	10.930	13,620	21,450	
8 ¾ combo	N/A	N/A	82.66	N/A	N/A	7/8	3.4	0.087	400-900	30-80	800	28.190	22,530	35,480	
						7/8	4.0	0.160	300-900	48-143	1,000	16.400	16,400	24,600	
						7/8	5.9	0.160	400-900	80-140	1,390	15.770	21,870	34,400	
						7/8	7.0	0.166	400-1000	66-166	1,580	15.323	24,130	36,200	
						4/5	5.3	0.240	300-950	70-230	1,250	10.930	13,620	21,450	
9 ⅝	N/A	N/A	77	101	N/A	5/6	5.0	0.127	700-1300	90-170	1,180	20.670	24,290	36,440	
						6/7	5.0	0.127	600-1300	80-170	1,180	23.860	25,720	37,570	
9 ⅝ combo	N/A	N/A	77	101	N/A	7/8	3.4	0.087	400-900	30-80	800	28.190	22,530	35,480	
						7/8	4.0	0.160	300-900	48-143	1,000	16.400	16,400	24,600	
						7/8	5.9	0.160	400-900	80-140	1,390	15.770	21,870	34,400	
						7/8	7.0	0.166	400-1000	66-166	1,580	15.323	24,130	36,200	
						4/5	5.3	0.240	300-950	70-230	1,250	10.930	13,620	21,450	

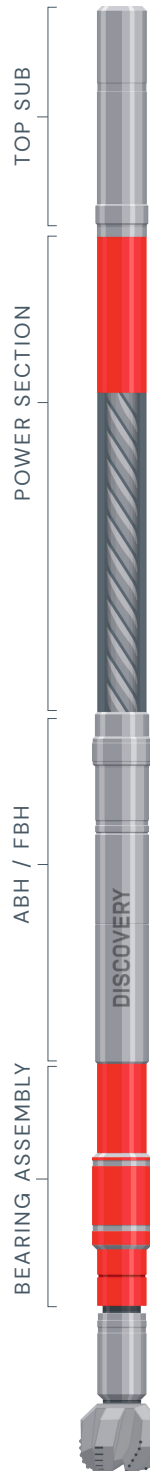

Locations

Conroe, Texas

7185 Old Highway 105 West
Conroe, TX 77304

Casper, Wyoming

1855 Skyview Drive
Casper, WY 82601

Dickinson, North Dakota

11121 30J Street Southwest
Dickinson, ND 58601

Denver, Colorado

633 17th St., Suite 2350
Denver, CO 80202

Midland, Texas

Field Office & Stock Point
Midland, TX

Download



Motor Book